


Certificate of Analysis-Glass Bead

General Information

Product	: Glass Bead
Apply to	: Blasting, Jetting, Cleaning
Country of Origin	: China
Manufacturer of Material	: Komeno

Picture of Product:

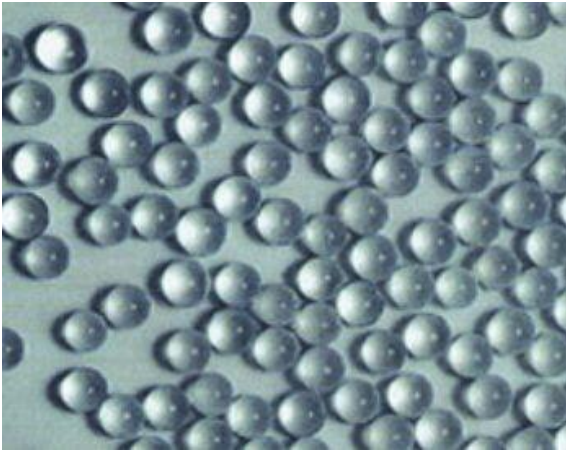

Physical Specifications & Package

Soda Lime Glass	: No free silica
Specific Gravity	: 2.45-2.50 g /cm ³
Bulk Density	: \cong 1.5 kg / m ³
Hardness	: 5-7 MOSH, Typically 6
Color	: Clear / Colorless
Configuration	: Spherical/Round
Roundness	: \cong 80%, Typically 82%
Reflective Index	: \cong 1.5, Typically 1.52
Package	: 1 Ton Big Bag, 25kg Bag and 40 Bags on a Pallet



Komeno(Beijing)International Trading Co.,Ltd.

No.111 Yuquanying,Fengtai District, Beijing City,Beijing,100071,P.R.CHINA TEL:
0086-10-83323238 EMAIL: Sales@komeno.com.cn

Chemical Specifications

Typical Chemical Composition (%)

SiO ₂	: 73.00
Na ₂ O	: 14.30
K ₂ O	: 0.60
CaO	: 9.20
MgO	: 4.00
Fe ₂ O ₃	: 0.11
Al ₂ O ₃	: 2.00
SO ₃	: 0.30

Mostly Used Sizes of glass beads for blasting or jetting

Type	Mesh	Diameter(um)
30#	20-40	850-425
60#	40-60	425-250
80#	60-100	250-150
100#	80-140	180-100
120#	100-140	150-100
150#	100-200	150-70
180#	140-200	100-70
220#	140-270	100-50
280#	200-325	70-45
320#	<325	<44